


RadioWavz

End Fed Terminated Antenna

EFT-110

The RadioWavz EFT series end fed terminated antenna is a broadband antenna designed for fixed station, multi-frequency applications. The antenna can be mounted horizontally between two support systems as a terminated sloper, or as an inverted 'V' using a single central support mast. This antenna type is widely used by military, commercial services. The EFT antenna line is made with extremely durable stranded Copper Clad Steel.

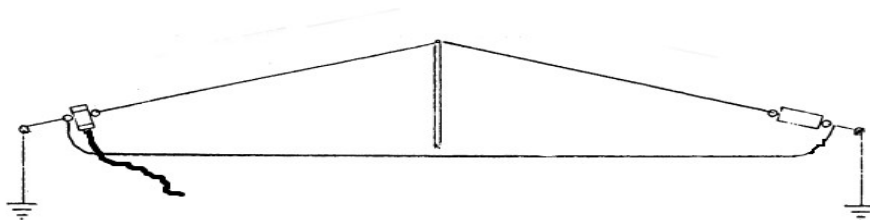

- Pre Tuned no measuring or cutting!!
- Easy to install
- Fantastic performer
- Great for ALE Applications.
- An excellent broadband antenna.

Specifications:

Impedance: 50 Ohm nominal
Bandwidth :1.7-30 MHz, 20-10m
Length : 110 ft.
Power : 1.5kw Impulse
 : 500w PEP SSB
 : 200w AM/FM/RTTY
Connector : SO 239

RadioWavz Double Bazookas
G5RV's Dipoles

One of the most important components in any radio station is the antenna. It is important to take time and plan out your installation.

Antenna Safety

Under no circumstances will RadioWavz be liable for any damages or consequential damages arising from use or misuse of our products.

The installation or dismantling of any antenna near power lines is dangerous. Each year hundreds of people are killed or injured while attempting to install or dismantle an antenna. In many cases, the victim was well aware of the dangers, but did not take adequate steps to avoid the hazards. For your safety and proper antenna installation, read and follow all safety precautions.

Choose an installation site for safety as well as performance.

Power lines, cable lines and telephone lines look alike. To be safe, assume ANY overhead line can kill you.


Do not place an antenna where it could potentially fall on to, or blow into a power line. To determine the SAFE DISTANCE follow these steps:

- Determine the proposed height of your antenna.
- Add the antenna length and the length of your tower mast.
- Double the figure.

Your answer will be the minimum safe distance from the nearest power line that you should install your antenna.

Outdoor antennas should be grounded with an approved lighting arresting device. Local codes may apply. The radio should also be grounded to an earth ground to help protect both the radio and its user. Do not use hot water pipes or gas lines as a ground source.

OUTDOOR ANTENNA GROUNDING-If an outside antenna system is connected to any radio receiver or transmitter, be sure the antenna or cable system is grounded so as to provide some protection against voltage surges and built up static charges. Section 810 of the National Electrical Code, ANSI/NFPA No.70-1984, provides information with respect to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna discharge unit, size of grounding conductors, location of antenna discharge unit, connection to grounding electrodes, and requirements for the grounding electrode. Also refer to the ARRL's antenna safety instruction.

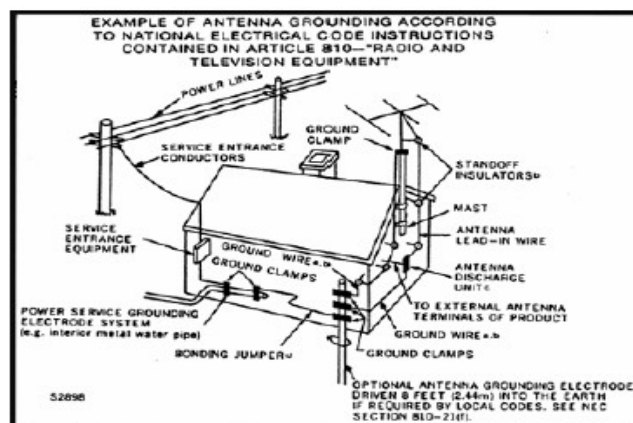

Installation

- (1) Prepare supports, paying attention to best possible height , antenna configuration, and alignment. Do not install parallel to power lines.
- (2) Unpack the antenna. Lay it on the ground.
- (3) The antenna ends may be attached various ways. When mounting off the ground, Good ground rods are recommended at each end. The counterpoise wire should connect to the ground side of the balun and terminating network. The antenna may work best with the counterpoise *not* connected to the ground side of the terminating network. Try both to determine best results for your installation. The counterpoise is essential in poor ground, dry soil, or above ground installations. Its length is not critical, and it *does not* have to run directly under the antenna wire.
- (4) Uncoil the antenna. Avoid twisting, kinking. Keep the antenna taut during uncoiling.
- (5) Attach your transmission line and raise the antenna up in the air. Again avoid twisting, kinking or springing.
- (6) Run transmission line to the station. Run the transmission line down to the ground, and perpendicular to the antenna for as far as possible. This is important Only use a sufficient length of transmission line to reach the station
- (7) Your antenna is ready for operation. It is broadband and pre tuned for an average SWR of 1.4:1 to 2.0:1 in HF depending upon the frequency used and surrounding objects, ground conditions, etc. The use of a good antenna tune may be required in bad locations, to manage the SWR to a workable level.

WARRANTY

RadioWavz guarantees each product to be free from defects in material and workmanship for 90 days from date of purchase. The warranty applies to the original purchaser only, and we will repair or replace the product at our discretion. Under no circumstances will RadioWavz be liable for any damages or consequential damages arising from use or misuse of our products. Warranty is voided if product is subject to misuse, neglect, accident, improperly installed or used in violation of the instructions furnished by us. We reserve the right to make changes in design at any time without obligation to update previously manufactured models. This warranty is given in lieu of any other warranty, expressed or implied.

RadioWavz

**607 Blue Cove Terrace
Lake Saint Louis, MO 63367
(636)265-0448
Fax (866) 201-0593
Sales@radiowavz.com
www.radiowavz.com**